


Übergangsmuffe G-G

Adaptateur femelle G - femelle G

Female adaptor G-G

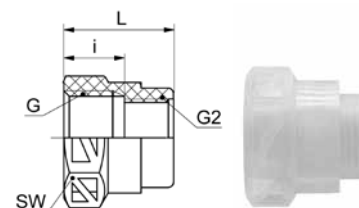


SO 20031

Type -G -G2	Mat.-Nr.	bar +	SW	L	i	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)			
G2=Rohrgewinde (zylindrisch)	G2=Filetage-gaz BSP (cylindrique)		G2=BSP thread (parallel)			
SO 20031-1/8-1/8	126.0311.042	10	14	16.0	8.0	0.190
SO 20031-1/4-1/8	126.0311.044	10	17	17.0	10.0	0.310
SO 20031-3/8-1/8	126.0311.046	10	22	18.0	11.0	0.530
SO 20031-1/2-1/8	126.0311.048	10	27	21.0	14.0	1.070
SO 20031-1/4-1/4	126.0311.104	10	17	17.5	9.0	0.320
SO 20031-3/8-1/4	126.0311.106	10	22	19.0	11.0	0.550
SO 20031-1/2-1/4	126.0311.108	10	27	22.0	14.0	1.010
SO 20031-3/8-3/8	126.0311.166	10	22	19.0	9.5	0.540
SO 20031-1/2-3/8	126.0311.168	10	27	22.5	14.0	1.050

Übergangsnippel G-R

Adaptateur femelle G - mâle R

Adaptor female G- male R

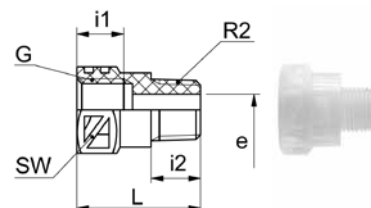

SO 20041

Type -G -R2	Mat.-Nr.	bar +	SW	L	i1	i2	e	kg/100
G=Rohrgewinde (zylindrisch)	G=Filetage-gaz BSP (cylindrique)		G=BSP thread (parallel)					
R2=Rohrgewinde (kegelig)	R2=Filetage-gaz BSP (conique)		R2=BSP thread (tapered)					
SO 20041-1/8-1/8	126.0411.042	10	14	20.0	7.0	8.0	6.0	0.220
SO 20041-1/8-1/4	126.0411.044	10	14	24.0	7.0	12.0	8.6	0.310
SO 20041-1/8-3/8	126.0411.046	10	17	25.0	7.0	12.0	8.6	0.650
SO 20041-1/8-1/2	126.0411.048	10	22	30.0	7.0	16.0	8.6	1.130
SO 20041-1/4-1/8	126.0411.102	10	17	21.0	8.0	8.0	6.0	0.340
SO 20041-1/4-1/4	126.0411.104	10	17	25.0	8.0	12.0	6.5	0.480
SO 20041-1/4-3/8	126.0411.106	10	17	25.0	8.0	12.0	11.5	0.470
SO 20041-1/4-1/2	126.0411.108	10	22	30.0	8.0	16.0	11.5	1.030
SO 20041-3/8-1/4	126.0411.164	10	22	26.0	8.5	12.0	6.7	0.690
SO 20041-3/8-3/8	126.0411.166	10	22	26.0	8.5	12.0	8.0	0.810
SO 20041-3/8-1/2	126.0411.168	10	22	30.0	8.5	16.0	15.0	0.860

Übergangsnippel G-G


mit O-Ringabdichtung (FKM)

Adaptateur femelle G - mâle G

avec joint torique (FKM)

Adaptor female G - male G

with O-ring seal (FKM)



SO 20041 OR

Type -G -G2	Mat.-Nr.	bar +	SW	L	i1	i2	O-Ring	e	kg/100
G=Rohrgewinde (zylindrisch)									
G2=Rohrgewinde (zylindrisch)									
SO 20041-1/2-3/8 OR	128.0471.001	10	27	33.0	15.0	10.0	14.0x1.78	10.0	1.830

Verschlussschraube R


mit Aussen-6kt.

Bouchon fileté R

à six pans

Screw plug R

with hex-nut




SO 20371

Type -R	Mat.-Nr.	SW	L	i	kg/100
R=Rohrgewinde (kegelig)					
R=Filetage-gaz BSP (conique)					
R=BSP thread (tapered)					
SO 20371-1/8	126.0721.020	12	13.0	8.0	0.170
SO 20371-1/4	126.0721.040	14	18.5	12.0	0.370
SO 20371-3/8	126.0721.060	17	19.0	12.0	0.610
SO 20371-1/2	126.0721.080	22	24.0	16.0	1.150

Einschraubtülle R

Douille cannelée à visser R

Male adaptor hose nozzle R

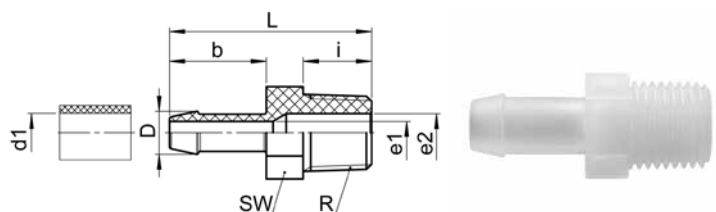

SO 20511

Type -d1 -R	Mat.-Nr.	bar +	SW	L	D	i	b	e1	e2	kg/100
R=Rohrgewinde (kegelig)										
R=Filetage-gaz BSP (conique)										
R=BSP thread (tapered)										
SO 20511-4-1/8	126.0511.060	10	12	24.0	5.0	8.0	11.0	3.0	5.1	0.190
SO 20511-6-1/8	126.0511.100	10	12	30.5	7.5	8.0	17.0	4.0	5.1	0.230
SO 20511-6-1/4	126.0511.110	10	14	35.5	7.5	12.0	17.0	4.0	6.7	0.430
SO 20511-8-1/4	126.0511.170	10	14	35.5	9.5	12.0	17.0	6.0	6.7	0.440
SO 20511-10-3/8	126.0511.280	10	17	38.0	11.5	12.0	19.0	7.0	8.0	0.750
SO 20511-12-3/8	126.0511.390	10	17	38.0	13.5	12.0	19.0	10.0	10.0	0.650
SO 20511-12-1/2	126.0511.400	10	22	43.0	13.5	16.0	19.0	10.0	12.0	1.260

d1 = Schlauchinnendurchmesser

d1 = diamètre intérieur du tuyau

d1 = hose inside diameter