



ART. 110 OX

BALL VALVE IN NICKEL PLATED BRASS DEGRADED FOR OXYGEN USE

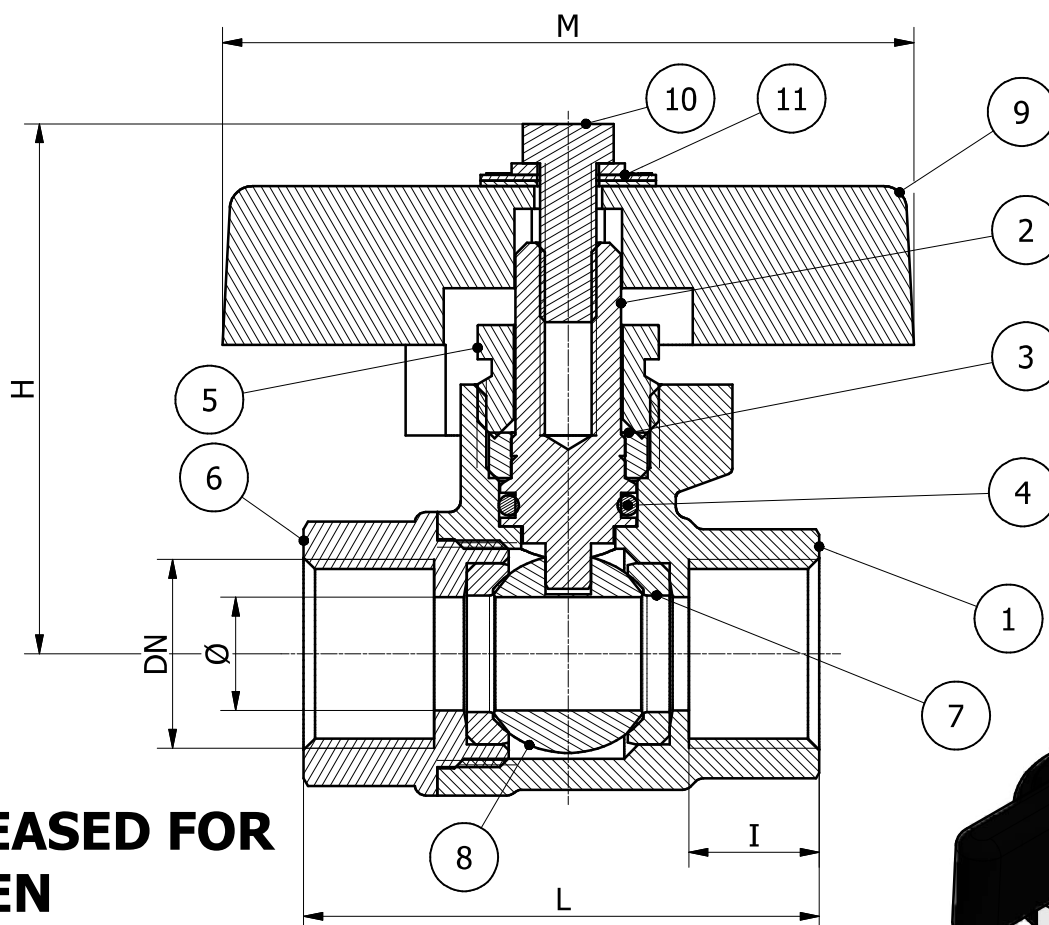

CE

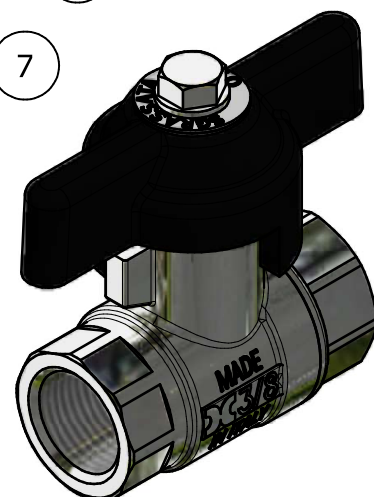

DEGREASED FOR OXYGEN

DN	1/4"	3/8"	1/2"	3/4"	1"
L	45.5	45.5	55.5	66	75
Ø	10	10	15	20	25
I	11.5	11.5	14	16	17
H	47.5	47.5	50	54	63
M	61	61	61	61	80
PN	40				

IN ACCORDING TO DIRECTIVE PED 2014/68/EU

Ref.	Parts	Material	Q.ty
1	Body	EN12420-CW617N	1
2	Pushrod	EN12164-CW614N	1
3	Gasket	P.T.F.E.	1
4	O-ring	FPM (Viton)	1
5	Nut	EN12164-CW614N	1
6	Sleeve	EN12420-CW617N	1
7	Seat	P.T.F.E.	2
8	Ball	EN12165-CW617N	1
9	Butterfly handle	Aluminium UNI 7369	1
10	Screw	UNI 7356-CB4FF	1
11	Washers	Stell zinked/aluminium	3

STANDARD VALVE FEATURES

USE WITH OXYGEN:

Temperature: MIN. -10°C MAX. +60°C

Pressure: MAX. 20 bar

GENERAL USE WITH COMPATIBLE FLUIDS

-Working temperature : MIN. -10°C MAX. +100 °C

-Max pressure : 40 bar

-Threaded ends : ISO 228/1

SPECIAL EXECUTIONS ON REQUEST

Personalized handle colour (suitable in **RED, BLUE** etc.)

We don't assume the responsibility if you use products which are not consistent with the material used for the construction of our valves.